

Hydraulic rip saw with retractable blade **DM82**



● GENERAL CHARACTERISTICS

- Frame..... Mono block steel structure
- Driving of the carriage Hydraulic
- Advance speed of the carriage From 0 up to 60 m/mn
- Setting of the advance speed By foot pedal
- Motor of the carriage 2,2 kW
- Motor of the blade 7,5 kW
- Blade Retractable
- Diameter of the blade Ø 400 mm and Ø 500 mm
- Cut length 3 m, 4 m, 5 m, 6 m
- Maximum cut height 90 mm (Ø 400 mm), 140 (Ø 500 mm)
- Stroke of the guide fence 350 mm
- Driving of the fence Manual by wheel
- Visualisation of the position of the fence Mechanical Siko counter
- Air pressure feeding 6 bars
- Air intakes 3 x Ø 160 mm
- Weight..... 1350 kg for machine of 3 m + 200 kg/m
- Dimensions See drawing of the leaflet

● OPTIONAL EQUIPMENTS

- Motors 9 kW, 11 kW, 15 kW
- Higher capacity between the blade and the guide fence : 600 mm and 1300 mm
- Laser
- Punctual pneumatic clamp
- Electric positioning of the fence
- Ball bearings inserted into the front table
- Digital readout of the position of the fence
- Table for miter cut

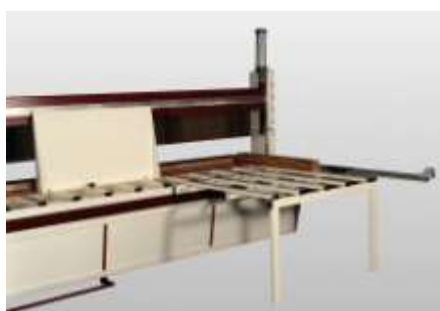


Table for miter cut

PARVEAU
Le bois a pris ses marques

PARVEAU MAB
19130 VIGNOLS
FRANCE
Tél. +33 (0)5 55 25 80 01
Fax +33 (0)5 55 25 06 29
Internet : <http://www.parveau.fr>
E.Mail : infos@parveau.fr